



Engines

XF 450 MX-11 (330 kW / 449 hp)
XF 430 MX-13 (315 kW / 428 hp)
XF 480 MX-13 (355 kW / 483 hp)
XF 530 MX-13 (390 kW / 530 hp)

GVM¹⁾

26000kg

Max. front 8000 kg
Max. rear 19000 kg

GCM²⁾

44000kg

Cab Exterior

Space Cab with galvanised steel bumper, tinted glass and electric window openers. Main mirrors and wide angle mirrors electrically heated. Cab width 2490 mm.; Cab suspension mechanical; LED daytime running lights; Front view mirror; Central door lock system, 2 keys, 2 RC units.

Optional

01760	Super Space Cab	08020	LED Headlights
01226	Cab suspension air	09982	No auxiliary lights in the bumper
01174	External sun visor green translucent	09984	Fog lights and cornering lights
06790	Aluminium ladder 1-piece	06593	Skylights
06791	Aluminium ladder 2-piece	06628	One hazard beacon light at co-driver side

00847 Air horns, single set
09006 Air horns, double set

06627 One hazard beacon light at driver side
06629 Two hazard beacon lights

Aerodynamics

Optional

08823	Adj. roof air deflector Space Cab; over 4 m (!)	06904	Fixed rf deflector; total height over 4 m
06776	Adjustable roof air deflector	07401	Winding handle for roof air deflector
08822	Adj. roof air deflector Space Cab	04906	Side collars
06160	Fixed roof air deflector for Super Space Cab		

Colours

Cab colour H3279 Brilliant White; Head lamp panel and bumper: Brilliant White; Chassis colour grey.

Cab Interior

Cab interior trim colour Dark Sand; Cab interior decoration Piano Black; Driver seat: Comfort Air; Co-driver seat: basic; Lower bunk without drawer; Luggage carrier; Automatic Temperature Control and airco; Auxiliary cab heater (water); Pollen filter.

Optional

07152	Cab interior trim colour Exclusive	07748	Co-driver seat: Xtra Leather Air
07592	Cab interior decoration Argenta	00967	Seat belts red
07591	Cab interior decoration Rustica	06539	Refrigerator
07733	Driver seat: Luxury Air	09603	Lower bunk with drawer 65 litres
07736	Driver seat: Super Air	06784	Lower bunk mattress Xtra Comfort
07737	Driver seat: Xtra Leather Air	01065	No upper bunk/ no luggage carrier
07741	Co-driver seat: Comfort Air	01066	Upper bunk
07743	Co-driver seat: Luxury Air	06676	PL light in cab ceiling
07746	Co-driver seat: Super Air	06970	Automatic Cab Climate Control

Communication & Driving Management

Tachograph digital, Stoneridge 1C; Speed limiter setting 85 km/h; Eco off 90 km/h; Antennas: AM/FM, 2x GSM, GPS; Adaptive Cruise Control with FCW and AEBS; Driver Performance Assistant.

Optional

09681	Preparation for Maut	07261	TruckPhone
07117	Radio/ USB player, 2 speakers	06991	Predictive Cruise Control
01100	Truck Navigation Radio, 6 speakers		

Safety & Security

Lane Departure Warning System; Vehicle Stability Control (VSC); Basic engine immobiliser system.

Optional

06831	Air bag (driver) and 2 seat belt tensioners	09828	Front camera system
07011	DAF Night Lock	09827	Side camera system
02178	Main switch with second control in the cab	01725	Reverse warning

Suspension & Axles

Front axle load 8.00 t; Rear: 11.50 + 7.50 t, air suspension, SR1344.

Optional

01769	Front axle load 7.50t	04588	Rear axle SR1347
06257	Front axle load 9.00t	00009	Rear axle load 11.50+7.10t
04057	Rear axle HR1356	08191	Axle load monitoring

Wheels & Tyres

Front axle 1: 315/70R22.5; Front axle 2: 315/70R22.5; Rear axle 1: 315/70R22.5; Disc wheels steel, silvergrey; Wheel protection rings silvergrey.

Optional

06152	Tyre makes and types
--------------	----------------------

Driveline

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres. Output 330 kW (449 hp) at 1600 rpm. Maximum torque 2300 Nm at 900-1125 rpm.; Exhaust emission Euro 6; Engine idle shutdown, 5 minutes; Automated gearbox, TraXon, 12 speeds; Gearbox ratio 16.69-1.00; Rear axle ratio 2.38; ASR.

Optional

04523	Manual gearbox, 16 speeds	02314	Gearbox overdrive
07103	Automated gearbox, TraXon, 16 speeds		

Brake System

MX Engine Brake; Park brake control with test position; Ventilated disc brakes front and rear. Dual circuit air system with electronic control (EBS). Twin cylinder air compressor with heated dryer and economy mode.

Optional

09920	No MX Engine Brake	04901	Spring brake cylinders on the first front axle
02715	ZF Intarder		

Chassis

Wheelbase 3.95 m / rear overhang 0.99 m; Side member height 260 mm; Exhaust pipe horizontal, low; Alu fuel tank 400 l with step, height 620 mm; Rear mudguards; Worklamp white; Spray suppression; Front underrun protection (FUP); Catwalk with step; AdBlue tank 90 litres on left-hand mudguard; Batteries in rear overhang, no spare wheel carrier.

Optional

06611	Exhaust pipe vertical, high	03624	One wheel chock
07053	Worklamp LED	06306	Two wheel chocks
03139	Battery box behind the cab, no spare wheel carrier	03323	Rear light LEDs
03055	Vert battery box right, no spare wheel carrier		

Drawbar & Trailer Equipment

Fifth wheel Jost type JSK36DV, pressed steel, height 205 mm with 40 mm mounting plate. King pin diameter 2 inches, D-value 152 kN, maximum vertical load 20 tonnes.; Fifth wheel KA dimension 820 mm; Pneumatic trailer connection C-type; Electric connection 24 V / 2x7 pins; Trailer connection storage box.

Optional

09472	No lead-up ramps	06731	Chassis protection beam
-------	------------------	-------	-------------------------

Power Take-Off (PTO)

Optional

16148	PTO types & positions
-------	-----------------------

Electrical Power Supply

Alternator 80 A, batteries 2x 230 Ah.

Optional

06460	Alternator 120 A	08775	Alternator 150 A
-------	------------------	-------	------------------

GVM & GCM

Chassis weight related technical GVM max 27000 kg; Driveline related max GCM 50000 kg class 3.

Optional

03673	Driveline related max GCM 44000 kg class 2	00818	Driveline related max GCM 60000 kg class 3
00939	Driveline related max GCM 56000 kg class 2		

Application Conditions

Air intake high.

Optional

08400	Silent mode	03648	Cyclonic air intake high
03646	Air intake front		



Service & Maintenance

Standard Warranty takes care of 1 year complete vehicle, 2nd year driveline and 1st year breakdown.; ITS service.

Optional

08311 Service interval extended

DAF XF 450 FTG 6X2

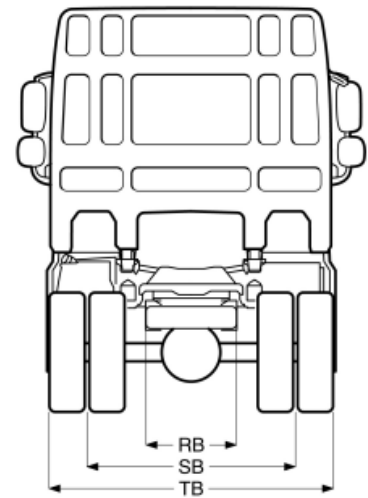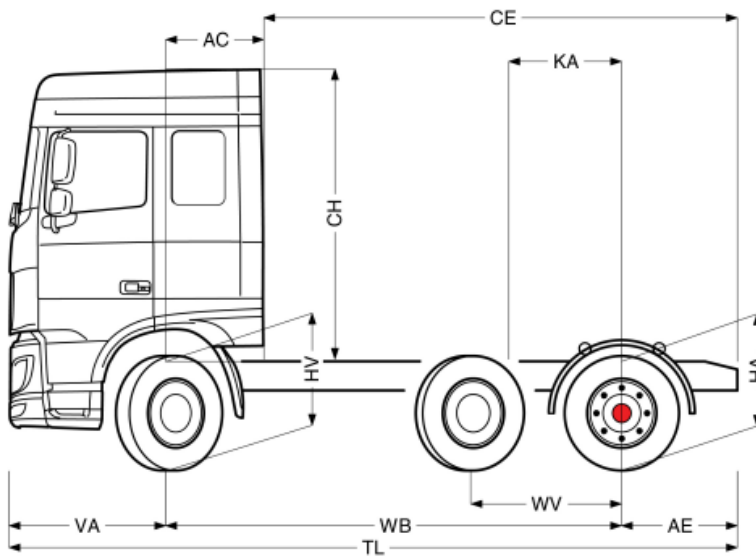

	Wheelbase - AE		Unladen weight ¹⁾			Gross Carrying Capacity			Variable dimensions								
SPACE CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CE	CH ⁶⁾	KA ⁷⁾	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
	3.95	0.99	5123	3345	8467	2877	15655	17533	0.88	4.06	2.56	0.82	6.31	0.97	0.95	15.21	16.47
	4.15	0.99	5151	3392	8543	2849	15608	17457	0.88	4.26	2.56	0.82	6.51	0.97	0.95	15.79	17.05
SUPER SPACE CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CE	CH ⁶⁾	KA ⁷⁾	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
	3.95	0.99	5187	3343	8530	2813	15657	17470	0.88	4.06	2.94	0.82	6.31	0.97	0.95	15.21	16.47
	4.15	0.99	5216	3390	8606	2784	15610	17394	0.88	4.26	2.94	0.82	6.51	0.97	0.95	15.79	17.05

OTHER DIMENSIONS VA: 1.37 WV: 1.32 HV¹²⁾: 0.98 HV¹³⁾: 0.93 RB: 0.79 SB: 1.82 TB¹⁴⁾: 2.48

- 1) GVM in conformity with registration documents.
- 2) GCM in conformity with registration documents.
- 3) Axle load with standard tyre size.
- 4) Chassis and cab weight calculated with: Standard specification items only with 400 litres of fuel, 90 litres of AdBlue® and driver of 90 kg, tolerance $\pm 3\%$. Changing of the specification can have major impact on vehicle weight.
- 5) Other AE dimensions may be available for shown WB.
- 6) Cab height is measured from frame member to closed cabin roof hatch.
- 7) Calculate customer specific KA with TOPEC.
- 8) Unladen height at centre of driven axle(s).
- 9) Laden height at centre of driven axle(s).
- 10) TK = turning circle between kerbs.
- 11) TW = turning circle between walls.
- 12) Unladen height at centre of front axle(s).
- 13) Laden height at centre of front axle(s).
- 14) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.