



## Engines

XG NewGen 450 MX-11 (330 kW / 449 hp)  
 XG NewGen 430 MX-13 (315 kW / 428 hp)  
 XG NewGen 480 MX-13 (355 kW / 483 hp)  
 XG NewGen 530 MX-13 (390 kW / 530 hp)

## GVM<sup>1)</sup>

25498 kg

Max. front 7500 kg  
 Max. rear 17998 kg

## GCM<sup>2)</sup>

44000kg

## Cab Exterior

Luxurious cab for XG series, with unrivalled aerodynamics for fuel efficient driving and low CO2 emissions. The huge and deep frontscreen, curved at the sides combined with large side windows offer an unsurpassed direct view for the driver, to enhance road safety. The cab interior is extremely comfortable for driving, living and sleeping with unprecedented spaciousness and practical layout. Cab length: 2690 mm; cab width: 2500 mm.; Cab suspension mechanical; Front view mirror; Central door lock system, 2 keys, 2 RC units.

## Optional

<b>01226</b>	Cab suspension air	<b>00949</b>	LED Skylights; aux. LED lights on cab rf, prepared
<b>03358</b>	External sun visor	<b>01891</b>	Hazard beacons on cab front, prepared

<b>06790</b>	Aluminium ladder 1-piece	<b>01900</b>	Hazard beacons on cab rear, prepared
<b>06791</b>	Aluminium ladder 2-piece	<b>06629</b>	Two hazard beacon lights
<b>04355</b>	Air horns, prepared	<b>03232</b>	Front windscreen with solar control foil
<b>00847</b>	Air horns, single set	<b>01886</b>	Laminated glass with solar control foil
<b>09006</b>	Air horns, double set	<b>01362</b>	DAF Digital Mirror System
<b>01043</b>	LED head and cornering lights	<b>01913</b>	DAF Corner View
<b>03922</b>	Fog lights front		

## Aerodynamics

### Optional

<b>03403</b>	Adjustable roof air deflector for XG cab	<b>02889</b>	Chassis bottom execution front: high
<b>04906</b>	Side collars	<b>02952</b>	Chassis bottom execution front: bottom plate aero

## Colours

Cab colour E1980 Chrystal White; Chassis colour grey.

## Cab Interior

Cab interior trim colour: Exclusive; Cab interior decoration: Hexagon; Driver seat: Comfort Air; Co-driver seat: cinema with fabric cover; Luggage carrier; Automatic Temperature Control and airco; Auxiliary cab heater (water).

### Optional

<b>02355</b>	Steering wheel, leather	<b>02298</b>	Co-driver seat, swivel base
<b>02353</b>	Cab interior decoration: Argenta	<b>00967</b>	Seat belts red
<b>02350</b>	Cab interior decoration: Natura	<b>02823</b>	Television, prepared
<b>07733</b>	Driver seat: Luxury Air	<b>04070</b>	Two drawers
<b>07736</b>	Driver seat: Super Air	<b>04050</b>	Refrigerator and drawer
<b>07737</b>	Driver seat: Xtra Leather Air	<b>04069</b>	Two refrigerators
<b>02241</b>	Driver seat, swivel base	<b>02854</b>	Xtra Comfort mattress for lower bunk
<b>03461</b>	Co-driver seat: cinema + table; fabric cover	<b>02858</b>	Xtra Comfort mattress for adjustable lower bunk
<b>07741</b>	Co-driver seat: Comfort Air	<b>02841</b>	Foam mattress for adjustable lower bunk
<b>03781</b>	Co-driver seat: cinema with alcantara cover	<b>01775</b>	Xtra Comfort mattress with topper for lower bunk
<b>07743</b>	Co-driver seat: Luxury Air	<b>02860</b>	Xtra Comfort mattress + topper for adj. lower bunk
<b>03849</b>	Co-driver seat: cinema + table; alcantara cover	<b>02380</b>	Mattress for DAF Relax Bed
<b>03848</b>	Co-driver seat: cinema with leather cover	<b>04150</b>	Mattress with topper for DAF Relax Bed
<b>07746</b>	Co-driver seat: Super Air	<b>01066</b>	Upper bunk
<b>03862</b>	Co-driver seat: cinema + table; leather cover	<b>06970</b>	Automatic Cab Climate Control
<b>07748</b>	Co-driver seat: Xtra Leather Air		

## Communication & Driving Management

Tachograph digital, Stoneridge 1C; Speed limiter setting 85 km/h; Eco off 90 km/h; Antennas: radio, 2x cellular, GNSS; Adaptive Cruise Control with FCW and AEBS-CM2.

### Optional

<b>09681</b> Preparation for Maut	<b>02825</b> DAF Infotainment System: Luxury
<b>02828</b> DAF Infotainment System: Exclusive	<b>06991</b> Predictive Cruise Control

## Safety & Security

Lane Departure Warning System; Vehicle Stability Control (VSC); Basic engine immobiliser system.

### Optional

<b>02178</b> Main switch with second control in the cab	<b>00795</b> Safety regulations EC ADR
<b>01725</b> Reverse warning	<b>01963</b> City turn assist

## Suspension & Axles

Front axle load 8.00 t; Rear axle SR1344; Lifting device.

### Optional

<b>01769</b> Front axle load 7.50t	<b>04588</b> Rear axle SR1347
<b>06257</b> Front axle load 9.00t	<b>08191</b> Axle load monitoring
<b>04647</b> Front springs air	

## Wheels & Tyres

Front axle(s): 315/60R22.5; Second front or leading axle: 315/60R22.5; Driven rear axle(s): 295/60R22.5; Disc wheels steel, silvergrey; Wheel protection rings silvergrey.

### Optional

<b>06877</b> Disc wheels steel, black	<b>02434</b> Wheels aluminium Alcoa Dura-Bright 32 mm
<b>06879</b> Wheels aluminium Alcoa Brushed 32 mm	<b>06152</b> Tyre makes and types

## Driveline

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres. Output 330 kW (449 hp) at 1600 rpm. Maximum torque 2300 Nm at 900-1125 rpm.; Exhaust emission Euro 6; Engine idle shutdown, 5 minutes; Automated gearbox, TraXon, 12 speeds; Gearbox ratio 16.69-1.00; Rear axle ratio 2.05; ASR.

### Optional

<b>07103</b> Automated gearbox, TraXon, 16 speeds
---

## Brake System

MX Engine Brake; Park brake control pneumatic; Ventilated disc brakes front and rear. Dual circuit air system with electronic control (EBS).

## Optional

02287	Exhaust brake	02715	ZF Intarder
02281	ZF Intarder	04901	Spring brake cylinders on the first front axle
02304	MX Engine Brake and ZF Intarder		

## Chassis

Wheelbase 3.95 m / rear overhang 0.99 m; Side member height 260 mm; Exhaust pipe horizontal, low; Tank for AdBlue® 85 l, on left-hand mudguard; Front underrun protection (FUP); Catwalk with step; Rear mudguards; Spray suppression; Work lamp LED.

## Optional

03624	One wheel chock	03323	Rear light with LEDs
06306	Two wheel chocks		

## Drawbar & Trailer Equipment

; Fifth wheel KA dimension 570 mm; Lead-up ramps; Pneumatic trailer connection C-type; Electric connection 24 V / 2x7 pins.

## Bodies & Preparations for Bodying

### Optional

03225	Application connector flexible
-------	--------------------------------

## Power Take-Off (PTO)

### Optional

16148	PTO types & positions
-------	-----------------------

## Electrical Power Supply

Alternator 110 A, batteries 2x 230 Ah.

### Optional

04492	Alternator 130 A	07671	Batteries 2x210Ah AGM C-type
08775	Alternator 150 A		

## GVM & GCM

Chassis weight related technical GVM max 26600 kg; Driveline related max GCM 44000 kg class 2.

### Optional

03675	Driveline related max GCM 50000 kg class 3
-------	--

## Application Conditions


Air intake front.

## Service & Maintenance

Standard Warranty takes care of 1 year complete vehicle, 2nd year driveline and 1st year breakdown.; ITS service.

### Optional

**08311** Service interval extended

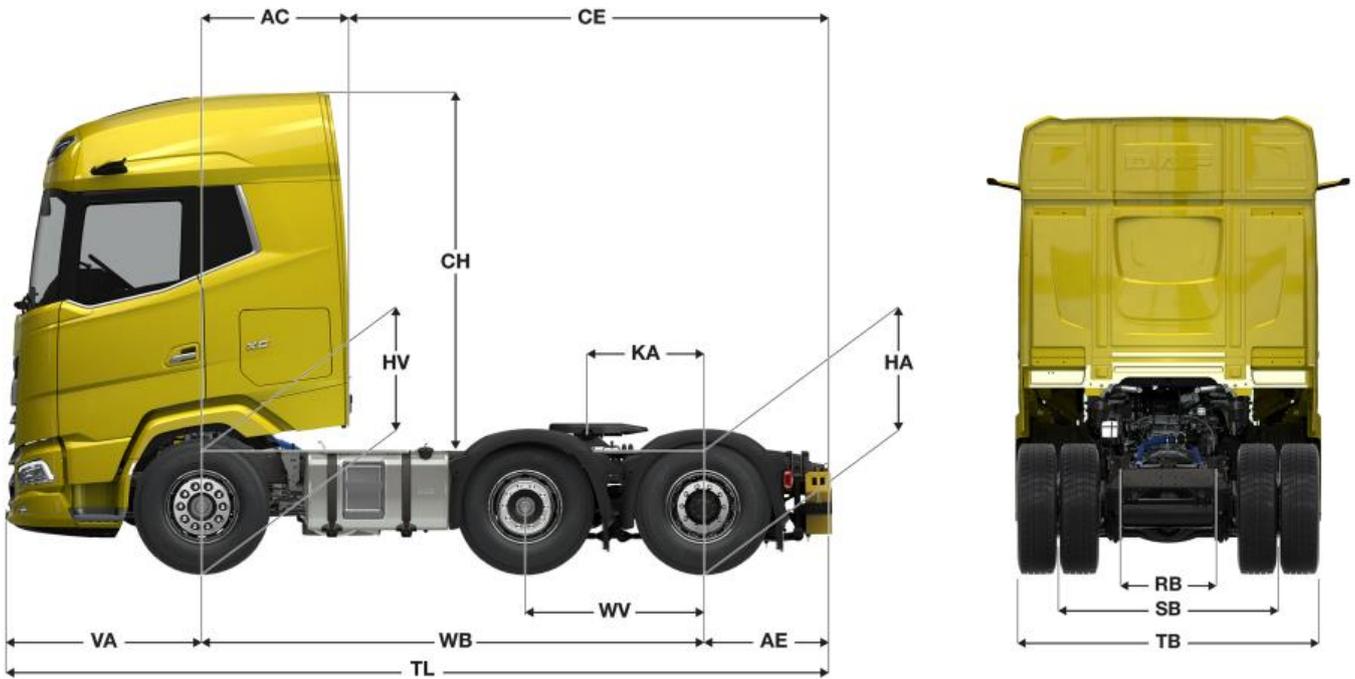

XG CAB	Wheelbase - AE		Unladen weight <sup>1)</sup>			Gross Carrying Capacity			Variable dimensions								
	WB	AE <sup>5)</sup>	Front	Rear	Total	Front	Rear	Total	AC	CE	CH <sup>6)</sup>	KA <sup>7)</sup>	TL	HA <sup>8)</sup>	HA <sup>9)</sup>	TK <sup>10)</sup>	TW <sup>11)</sup>
	3,95	0,99	5041	3134	8174	2459	14865	17324	1,16	3,78	2,83	0,57	6,47	0,93	0,90	12,65	14,01
	4,15	0,99	5071	3148	8219	2429	14850	17280	1,16	3,98	2,83	0,77	6,67	0,93	0,91	13,17	14,54

OTHER DIMENSIONS	VA: 1,53	WB: 1,32	HV <sup>12)</sup> : 0,94	HV <sup>13)</sup> : 0,90	RB: 0,79	SB: 1,82	TB <sup>14)</sup> : 2,46
------------------	----------	----------	--------------------------	--------------------------	----------	----------	--------------------------

- 1) GVM in conformity with registration documents.
- 2) GCM in conformity with registration documents.
- 3) Axle load with standard tyre size.
- 4) Chassis and cab weight calculated with: Standard specification items only with 400 litres of fuel, 85 litres of AdBlue® and driver of 90 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.
- 5) Other AE dimensions may be available for shown WB.
- 6) Cab height is measured from frame member to closed cabin roof hatch.
- 7) Calculate customer specific KA with TOPEC.
- 8) Unladen height at centre of driven axle(s).
- 9) Laden height at centre of driven axle(s).
- 10) TK = turning circle between kerbs.
- 11) TW = turning circle between walls.
- 12) Unladen height at centre of front axle(s).
- 13) Laden height at centre of front axle(s).
- 14) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.

**NG DAF XG 450 FTG 6X2**

