

DAF CF 300 FAR 6X2 Rigid, 26t



Engines

CF 300 MX-11 (220 kW / 299 hp)
CF 340 MX-11 (251 kW / 341 hp)

GVM¹⁾

26000kg

GCM²⁾

40000kg

Max. front 8000 kg
Max. rear 19000 kg

Cab Exterior

Day Cab with galvanised steel bumper, tinted glass and electric window openers. Main mirrors and wide angle mirrors electrically heated. Cab width 2300 mm.; LED daytime running lights; Electrically adjustable mirrors; Front view mirror.

Optional

02106	Sleeper Cab	09983	Fog lights
01137	Space Cab	09984	Fog lights and cornering lights
01226	Cab suspension air	06593	Skylights
01174	External sun visor green translucent	06628	One hazard beacon light at co-driver side
00847	Air horns, single set	06627	One hazard beacon light at driver side
09006	Air horns, double set	06629	Two hazard beacon lights
08020	LED head lights		

Aerodynamics

Optional

06776	Adjustable roof air deflector.	04906	Side collars
-------	--------------------------------	-------	--------------

Colours

Cab colour H3279 Brilliant White; Head lamp panel and bumper: Brilliant White; Chassis colour grey.

Optional

06485	Head lamp panel and bumper: cab colour	09933	Head lamp panel and bumper: Stone Grey
-------	--	-------	--

Cab Interior

Cab interior trim colour Dark Sand; Cab interior decoration Black Rock; Driver seat: Comfort Air; Co-driver seat: basic; Automatic Temperature Control and airco; Roof hatch glass, manual control; Pollen filter.

Optional

09271	Steering wheel, leather, colour black	07746	Co-driver seat: Super Air
07240	Steering wheel, leather, Exclusive	07748	Co-driver seat: Xtra Leather Air
07152	Cab interior trim colour Exclusive	00967	Seat belts red
07592	Cab interior decoration Argenta	02117	Third seat
07591	Cab interior decoration Rustica	06539	Refrigerator
07733	Driver seat: Luxury Air	06783	Lower bunk foam mattress
07736	Driver seat: Super Air	06784	Lower bunk mattress Xtra Comfort
07737	Driver seat: Xtra Leather Air	06676	PL light in cab ceiling
07741	Co-driver seat: Comfort Air	06970	Automatic Cab Climate Control
07743	Co-driver seat: Luxury Air		

Communication & Driving Management

Tachograph digital, Stoneridge 1C; Speed limiter setting 85 km/h; Eco off 90 km/h; Antennas: AM/FM, 2x GSM, GPS; Adaptive Cruise Control with FCW and AEBS.

Optional

09681	Preparation for Maut	01100	Truck Navigation Radio, 6 speakers
08450	Luxury speaker system with 6 speakers	07261	TruckPhone
07117	Radio/USB player, 2 speakers	06991	Predictive Cruise Control

Safety & Security

Lane Departure Warning System; Vehicle Stability Control (VSC); Basic engine immobiliser system.

Optional

08631	Air bag (driver) and 2 seat belt tensioners	09827	Side camera system
09828	Front camera system	01725	Reverse warning

Suspension & Axles

Rear: 11.50 + 7.50 t, air suspension, SR1344.

Optional

06257	Front axle load 9.00 t	06568	Rear axle load 11.50+6.70 t
04647	Front springs air	01946	Rear axle load 12.00+7.40 t
04057	Rear axle HR1356	08191	Axle load monitoring
04588	Rear axle SR1347		

Wheels & Tyres

Front axle 1: 315/70R22.5; Rear axle 1: 315/70R22.5; Rear axle 2: 315/70R22.5; Disc wheels steel, silvergrey; Wheel protection rings silvergrey.

Optional

06152	Tyre makes and types
-------	----------------------

Driveline

Engine MX-11, 6 cylinder diesel engine, 10.8 litres. Output 220 kW (299 hp) at 1675 rpm. Max. torque 1350 Nm at 900-1400 rpm.; Exhaust emission Euro 6; Engine idle shutdown, 5 minutes; Automated gearbox, TraXon, 12 speeds; Gearbox ratio 12.92-0.77; Rear axle ratio 4.11.

Optional

04393	Manual gearbox, 9 speeds	04523	Manual gearbox, 16 speeds
-------	--------------------------	-------	---------------------------

Brake System

Ventilated disc brakes front and rear. Dual circuit air system with electronic control (EBS). Twin cylinder air compressor with heated dryer and economy mode.

Optional

09921	MX Engine Brake	04901	Spring brake cylinders on the first front axle
-------	-----------------	-------	--

Chassis

Wheelbase 5.05 m / rear overhang 2.90 m; Side member height 310 mm; Standard component location; Exhaust pipe horizontal, low; Steel fuel tank 390 l, height 580 mm; Spray suppression; Front underrun protection (FUP); AdBlue tank 45 litres, left-hand side chassis.

Optional

02393	Side member height 260 mm	07071	Spare wheel carrier right-hand side
06611	Exhaust pipe vertical, high	03323	Rear light with LEDs

Drawbar & Trailer Equipment

Closing member.

Optional

07033	Trailer coupling Ringfeder D=13.7	08027	Trailer coupling Rockinger D=20.0
07034	Trailer coupling Ringfeder D=20.0	07029	D-value cross member D=13.7
08026	Trailer coupling Rockinger D=13.0	07032	D-value cross member D=20

Bodies & Preparations for Bodying

Application connector on the cab front.

Power Take-Off (PTO)

Optional

16148	PTO types & positions
--------------	-----------------------

Electrical Power Supply

Alternator 80 A, batteries 2x 140 Ah.

Optional

06460	Alternator 120 A	08797	Batteries 2x175Ah
08775	Alternator 150 A	06440	Batteries 2x230Ah

GVM & GCM

Chassis weight related technical GVM max 27000 kg; Driveline related technical GCM 40000 kg class 3.

Optional

00200	Driveline related max GCM 38000 kg class 2
--------------	---


Application Conditions

Moisture separator, unheated; Air intake on the cab roof.

Optional

09961	Cyclonic air intake behind the cab
--------------	------------------------------------

DAF CF 300 FAR 6X2 Rigid, 26t

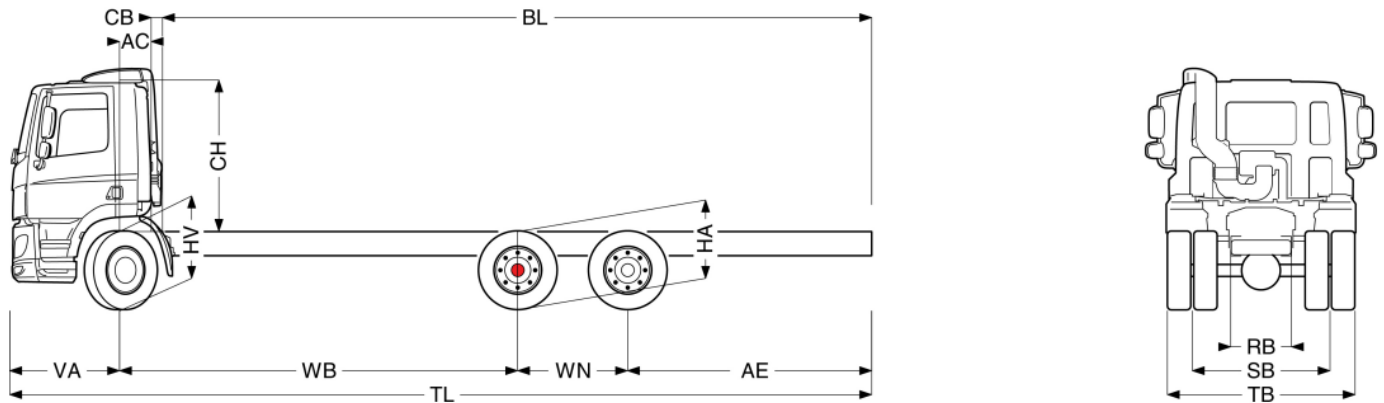

	Wheelbase - AE		Unladen weight ⁽⁴⁾			Gross Carrying Capacity			Variable dimensions									
	WB	AE ⁽⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁽⁶⁾	CH ⁽⁷⁾	BL ⁽⁸⁾	BL	TL	HA ⁽⁹⁾	HA ⁽¹⁰⁾	TK ⁽¹¹⁾	TW ⁽¹²⁾
DAY CAB	3.80	2.05	4439	3267	7706	3561	15733	18294	0.39	0.18	1.99	5.87	6.35	8.62	0.97	0.94	14.93	16.31
	4.20	2.40	4519	3462	7981	3481	15538	18019	0.39	0.18	1.99	6.53	7.05	9.37	0.97	0.94	15.97	17.36
	4.40	2.55	4537	3561	8098	3463	15439	17902	0.39	0.18	1.94	6.85	7.40	9.72	1.02	0.99	16.49	17.89
	4.60	2.75	4526	3596	8122	4474	15404	17878	0.39	0.18	1.94	6.59	7.74	10.12	1.02	0.99	16.98	18.38
	4.80	2.90	4528	3646	8174	4472	15354	17826	0.39	0.18	1.94	6.88	8.08	10.47	1.02	0.99	17.51	18.91
	5.05	2.90	4434	3692	8126	3566	15308	17874	0.39	0.18	1.94	7.83	8.46	10.72	1.02	0.99	18.19	19.61
	5.30	2.90	4440	3704	8144	3560	15296	17856	0.39	0.18	1.94	8.23	8.89	10.97	1.02	1.00	18.84	20.27
	5.60	2.85	4512	3814	8326	3488	15186	17674	0.39	0.18	1.94	8.74	9.43	11.22	1.02	1.00	19.63	21.06
5.90	2.80	4526	3825	8352	3474	15175	17648	0.39	0.18	1.94	9.23	9.96	11.47	1.02	1.00	20.41	21.85	
6.10	2.80	4540	3838	8378	3460	15162	17622	0.39	0.18	1.94	9.55	10.31	11.67	1.02	1.00	20.94	22.38	
SLEEPER CAB	4.20	2.40	4577	3467	8044	3423	15533	17956	0.82	0.16	1.99	5.73	6.26	9.37	0.97	0.94	15.97	17.36
	4.40	2.55	4595	3566	8162	3405	15434	17838	0.82	0.16	1.94	6.06	6.61	9.72	1.02	0.99	16.49	17.89
	4.60	2.75	4590	3601	8191	4410	15399	17809	0.82	0.16	1.94	5.79	6.95	10.12	1.02	0.99	16.98	18.38
	4.80	2.90	4592	3650	8242	4408	15350	17758	0.82	0.16	1.94	6.09	7.29	10.47	1.02	0.99	17.51	18.91
	5.05	2.90	4494	3697	8190	3506	15303	17810	0.82	0.16	1.94	7.04	7.67	10.72	1.02	0.99	18.19	19.61
	5.30	2.90	4500	3709	8208	3500	15291	17792	0.82	0.16	1.94	7.44	8.10	10.97	1.02	0.99	18.84	20.27
	5.60	2.85	4572	3818	8390	3428	15182	17610	0.82	0.16	1.94	7.95	8.65	11.22	1.02	1.00	19.63	21.06
	5.90	2.80	4586	3829	8416	3414	15171	17584	0.82	0.16	1.94	8.44	9.17	11.47	1.02	1.00	20.41	21.85
6.10	2.80	4600	3842	8441	3400	15158	17559	0.82	0.16	1.94	8.77	9.53	11.67	1.02	1.00	20.94	22.38	
SPACE CAB	4.20	2.40	4688	3468	8156	3312	15532	17844	0.82	0.16	2.67	5.78	6.31	9.37	0.97	0.94	15.97	17.36
	4.40	2.55	4706	3568	8274	3294	15432	17726	0.82	0.16	2.62	6.10	6.66	9.72	1.02	0.99	16.49	17.89
	4.60	2.75	4700	3602	8303	4300	15398	17697	0.82	0.16	2.62	5.84	7.00	10.12	1.02	0.99	16.98	18.38
	4.80	2.90	4703	3651	8354	4297	15349	17646	0.82	0.16	2.62	6.14	7.35	10.47	1.02	0.99	17.51	18.91
	5.05	2.90	4605	3698	8302	3395	15302	17698	0.82	0.16	2.62	7.10	7.73	10.72	1.02	0.99	18.19	19.61
	5.30	2.90	4611	3710	8320	3389	15290	17680	0.82	0.16	2.62	7.50	8.16	10.97	1.02	0.99	18.84	20.27
	5.60	2.85	4683	3819	8502	3317	15181	17498	0.82	0.16	2.62	8.01	8.71	11.22	1.02	1.00	19.63	21.06
	5.90	2.80	4697	3830	8528	3303	15170	17472	0.82	0.16	2.62	8.51	9.24	11.47	1.02	1.00	20.41	21.85
6.10	2.80	4711	3843	8554	3289	15157	17446	0.82	0.16	2.62	8.84	9.60	11.67	1.02	1.00	20.94	22.38	

OTHER DIMENSIONS VA: 1.37 WN: 1.40 HV⁽¹³⁾: 1.03 HV⁽¹⁴⁾: 0.98 RB: 0.79 SB: 1.82 TB⁽¹⁵⁾: 2.48

- 1) GVM in conformity with registration documents.
- 2) GCM in conformity with registration documents.
- 3) Axle load with standard tyre size.
- 4) Chassis and cab weight calculated with: Standard specification items only with 390 litres of fuel, 45 litres of AdBlue® and driver of 90 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.
- 5) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.
- 6) CB is based on standard air intake and/or exhaust.
- 7) Cab height is measured from frame member to closed cabin roof hatch. With air intake on cab roof add: 0.14 m (for MX- 11); add 0.21 m for MX-13.
- 8) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.
- 9) Unladen height at centre of driven axle(s).
- 10) Laden height at centre of driven axle(s).
- 11) TK = turning circle between kerbs.
- 12) TW = turning circle between walls.
- 13) Unladen height at centre of front axle(s).
- 14) Laden height at centre of front axle(s).
- 15) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.

DAF CF 300 FAR 6X2 Rigid, 26t

